arXiv:1301.7722v1 [quant-ph] 31 Jan 2013

Amplification of arbitrarily weak randomness

Piotr Mironowicz[1] and Marcin Pawłowski[2, 3]

[1]*Department of Microwave and Antenna Engineering,*
Faculty of Electronics, Telecommunications and Informatics,
Gdansk University of Technology, Gdansk 80-233, Poland[*]
[2]*Department of Mathematics, University of Bristol, Bristol BS8 1TW, U.K.*
[3]*Institute of Theoretical Physics and Astrophysics, University of Gdańsk, 80-952 Gdańsk, Poland*[†]

We demonstrate that amplification of arbitrarily weak randomness is possible using quantum resources. We present a randomness amplification protocol that involves Bell experiments. We report on two Bell inequalities which can amplify arbitrarily weak randomness and give detailed analysis for one of them. Our analysis includes finding a sufficient violation of Bell inequality as a function of the quality of randomness. It has a very important property that for any quality the required violation is strictly lower than possible to obtain using quantum resources. Among other things it means that the protocol takes a finite amount of time to amplify any randomness.

I. INTRODUCTION

The application of the laws of quantum mechanics allows to perform tasks impossible in classical information theory. The two most prominent examples are quantum computation [1] and cryptography [2]. Recently, another area where quantum information theory makes new things possible has been found. It is the amplification of weak randomness [3]. This procedure not only has obvious practical applications but it also sheds light on fundamental issues such as completeness of quantum mechanics. However, so far the possibility of randomness amplification has been demonstrated only under very restrictive conditions. To explain what they are we must first rigorously state the problem.

We are given a source, which generates a sequence of bits $\vec{x} = x_0, x_1, ...$ parameterized by a single constant ϵ. The bits may be correlated with each other and also with some external variables which we denote by λ. However, there is a certain intrinsic randomness in each of the bits quantified by

$$\forall_i \quad \frac{1}{2} - \epsilon \leq P(x_i = 0|x_0, ..., x_{i-1}, \lambda) \leq \frac{1}{2} + \epsilon. \tag{1}$$

If (1) holds we say that the sequence $\vec{x}$ (or the source) is ϵ-free. $\epsilon = 0$ corresponds to the case where the output of the source is perfectly random. When $\epsilon = \frac{1}{2}$ we cannot say anything about the source and it can be even deterministic. The aim of randomness amplification is to use some postprocessing of the sequence $\vec{x}$ to generate another sequence $\vec{y}$ which is ϵ'-free and $\epsilon' < \epsilon$.

The source of randomness described above is usually called a Santha-Vazirani source after the authors of [4], where they have proved that classical randomness amplification is impossible. In their groundbreaking paper Colbeck and Renner [3] showed that it is not true in the quantum case. However, the protocol that they have presented works only if the source of randomness is almost perfect to begin with. More precisely: if the source is ϵ-free with $\epsilon < 0.086$. Very recently another paper on this issue appeared [5]. There a protocol is presented which amplifies the randomness from any source with $\epsilon < \frac{1}{2}$. Unfortunately, it only works in the noiseless case, which is impossible in practice and even if it was possible it would take infinitely long time to finish the procedure.

Therefore, it remained an open question whether the amplification of arbitrarily weak randomness was possible. In this paper we answer this question affirmatively. We do so by presenting a single amplification protocol which can be based on one of two different Bell inequalities. Both cases work for any $\epsilon < \frac{1}{2}$ and can tolerate an amount of noise and experimental imperfections depending on ϵ. Practically, it means that the time taken to amplify any randomness is finite.

II. WHY RANDOMNESS AMPLIFICATION IS SO DIFFICULT?

The main problem with randomness amplification lies in our almost complete ignorance about the inner workings of the source. It provides us with an infinite sequence of bits, yet all we know about it is expressed by a single number ϵ. For every ϵ there exists an infinite number of ϵ-free sources and, while good randomness amplification procedures would work well for a vast majority of them, there will always be some that any given procedure fails to amplify. This is the essence of Santha-Vazirani proof.

Another problem is that, since we are interested only in the quality of the sequences, we do not have access to any independent source of randomness. Or, in other words, we assume that all the sources of randomness that we have access to can be correlated and form one big Santha-Vazirani source. Therefore, without loss of generality, any classical randomness amplification protocol can be reduced to applying a deterministic function to the output of the source to generate a new sequence: $\vec{y} = f(\vec{x})$.

---

[*] Electronic address: piotr.mironowicz@gmail.com
[†] Electronic address: maymp@bris.ac.uk

How quantum mechanics can help? After all it is a theory built on intrinsic randomness. On the other hand, we cannot simply use a quantum random number generator because, under our assumptions, it is also only ϵ-free. The solution lies in Bell inequalities. They have already been found useful in a related problem of device independent randomness expansion [6]. In a nutshell, the idea is to use the sequence $\vec{x}$ to choose the settings of a Bell experiment and consider the outcomes your new sequence $\vec{y}$. Based on these sequences the violation of the Bell inequality is estimated and its value tells us if the amplification was successful or not. Let us elucidate.

A. Biased nonlocal games

One way of interpreting Bell inequalities is to think of them as nonlocal games. Let us take CHSH [7] as an example. If we want to treat it as a game then we will have a team of two players - Alice and Bob playing against a referee. The referee sends bits a and b to Alice and Bob respectively and the players, without communication, announce their respective binary answers A and B. They win if $A \oplus B = ab$. Usually, it is assumed that the probability distribution of the inputs is uniform $p(a,b) = \frac{1}{4}$. Under this condition the maximal winning probability for the parties having only classical resources is $\frac{3}{4}$ while entanglement allows them to reach the success probability up to $\frac{1}{2}\left(1+\frac{1}{\sqrt{2}}\right)$.

If we are to use ϵ-free string of bits as a source of settings we cannot assume the uniform distribution of inputs anymore. Our game becomes a biased one with the success probability

$$P_s = \sum_{a,b} p(a,b) P(A \oplus B = ab | a,b). \tag{2}$$

The values of P_s for classical and quantum strategies for any distribution $p(a,b)$ are greater than their counterparts from the unbiased case. They have been found in [8]. For every Bell inequality, the larger the observed value of P_s is the more random the local outcomes must be. One can use the hierarchy of semi-definite programs (SDP) from [9] to efficiently find the lower bound on this randomness for any given distribution $p(a,b)$. Unfortunately, we do not know this probability distribution. We cannot even estimate it because it may be different in each round of the experiment and the choice of the distribution may be correlated with the state and measurement operators used by the player's devices via hidden variables λ. The only thing that we know about $p(a,b)$ is that both bits a and b come from an ϵ-free source. But the impossibility of the direct application of SDP is not the last of the obstacles.

Let us assume that our ϵ-free source is well-behaved: for all i $P(x_i = 0 | x_0, ..., x_{i-1}, \lambda) = \frac{1}{2} + \epsilon$. Even if Alice and Bob know this and adopt their states and measurements accordingly there is a value of ϵ above which quantum and classical P_s are the same. One can use the results from [8] to find this value to be $\epsilon_{crit} = \frac{1}{\sqrt{2}} - \frac{1}{2}$. And if a classical model exists that gives certain success probability in a nonlocal game there is also a deterministic one achieving it [10]. Therefore, whenever the parties have a source with ϵ above ϵ_{crit} whatever success probability they observe their outcomes can be deterministic. Fortunately, the value of ϵ_{crit} depends on the Bell inequality chosen for the protocol. Therefore, our task is also to find Bell inequalities which are better for the purposes of randomness amplification than CHSH or the ones studied in [3].

B. Protocol

Even if we find a good Bell inequality and a way to estimate the bias of the outcome by a function of success probability and initial bias $\epsilon' \leq g(P_s, \epsilon)$ we cannot simply take all the measurement outcomes and form $\vec{y}$ out of them. Because the state and measurement operators in each round can be different, so can be the success probability. Therefore, in j-th round the actual value of the success probability will be P_s^j leading to the corresponding ϵ^j while the parties can estimate only the average one $P_s = \frac{1}{N}\sum_{j=1}^{N} P_s^j$. Even if the average success probability is high, it is possible that for a very subset of rounds P_s^j are less or equal the classical maximum leading to $\epsilon'^j = \frac{1}{2}$ and the output sequence being $\frac{1}{2}$-free - in other words, failure of the amplification procedure.

Summing up, to amplify arbitrarily weak randomness we need three key ingredients:

- a good Bell inequality;
- a way to find the function $g(P_s, \epsilon)$ for this Bell inequality;
- a protocol generating sequence $\vec{y}$ from the outcomes of the experiment.

We now provide all of these.

III. BELL INEQUALITIES

To find a candidate for a Bell inequality to be used in randomness amplification protocol we first need to ask ourselves what properties are we looking for. To this end, let us consider one particular way of cheating. The measurement devices prepare an optimal classical strategy so they know in advance that for most of the messages from the referee they will produce a good answer but they also know that for some they will fail. The devices also know for which inputs they will fail. They can be tuned to the source of randomness in such a way that the inputs for the case when the devices fail are least likely to happen. We see that the weaker the randomness the higher the average success probability. If the randomness is very weak the success probability is close to 1. If we want to amplify arbitrarily weak randomness, to be certain that our device does not play this trick, the success probability with a quantum strategy has to be even higher. Obviously, it cannot be greater than 1 so we have to look for nonlocal games for which it is equal to 1.

Another property is more technical. The number of settings of the inequality for which this inequality reaches maximum success probability should be finite. Otherwise it would take an infinite amount of rounds of experiment to estimate the this probability. This immediately rules out chained Bell inequalities [11] used in [3].

Finally, we would like our inequality to be as simple as possible. This property is not a strict requirement but can make a big difference in the analysis of the protocol.

Taking this all into account we choose two Bell inequalities as our candidates: a variant of magic square game [12] and tripartite Mermin inequality [13].

In the former Alice and Bob have three possible inputs $a = 0, 1, 2$ and $b = 0, 1, 2$ respectively. Each of them must return three bits denoted A_0, A_1 and A_2 for Alice and B_0, B_1 and B_2 for Bob. There is however an additional constraint that $A_2 = A_0 \oplus A_1$ and $B_2 = B_0 \oplus B_1 \oplus 1$ which effectively reduces their outcomes to two bits. The parties win if $A_b = B_a$. Classical success probability for the unbiased version of this game is $\frac{8}{9}$ and using quantum resources allows to reach 1.

In the tripartite Mermin inequality Alice, Bob and Charlie each receive one bit input a, b and c respectively. There is a promise that $a \oplus b \oplus c = 0$. Each of them also returns a single bit denoted A, B and C. They win if $A \oplus B \oplus C = abc$. In the unbiased version of this game the classical success probability is $\frac{3}{4}$ and quantum mechanics again allows to reach 1.

IV. BOUNDING THE RANDOMNESS

As we have mentioned before, finding lower bounds on the quality of randomness generated by a playing a biased nonlocal game is highly non-trivial. Therefore we will have to adopt different methods for different games and introduce some new concepts. The results we present in this paper are for tripartite Mermin inequality only. The result for magic square game are analogous but exhibit much worse behavior in the sense of tolerance to experimental imperfections as a function of ϵ.

Definition 1 - Extremal ϵ-free source is a source in which

$$\forall_i \quad P(x_i = 0 | x_0, ..., x_{i-1}, \lambda) = \frac{1}{2} \pm \epsilon. \tag{3}$$

Definition 2 - A source $\mathcal{S}$ is a convex combination of sources $\mathcal{S}_i$ if it works in the following way: When asked to provide a sequence of random bits it chooses one of the sources $\mathcal{S}_i$ according to some predetermined probability distribution and then forwards the output of that source.

Theorem 3 - *Every ϵ-free source is a convex combination of extremal ϵ-free sources.*

A proof of this theorem will be presented in forthcoming work [14].

The immediate consequence of Theorem 3 is that in our analysis we can, without loss of generality, restrict ourselves to extremal ϵ-free sources. In the case of tripartite Mermin inequality we can use its symmetries to further simplify our task.

Our aim is to find an upper bound on the following quantity

$$P_{max} = \max_{a,b,c,X,i} P(X = i | a, b, c), \tag{4}$$

where $X \in \{A, B, C\}$ denotes the outcome of one of the parties. When we do then we know that the outcomes of the measurement are ϵ'-free with $\epsilon' < P_{max} - \frac{1}{2}$. In each round two bits a and b are taken from the ϵ-free source and the third is automatically chosen to satisfy the promise $a \oplus b \oplus c = 0$. Because this inequality is invariant under the permutation of the parties and under two of the parties simultaneously relabeling their inputs we can, without loss of generality, restrict ourselves to considering only one source for every ϵ. We take the one with $P(b = 0|a) = P(a = 0) = \frac{1}{2} + \epsilon$.

Only now we are able to use the hierarchy of semidefinite programs from [9] to find an upper bound on P_{max}. We find that one can obtain good bounds on P_{max} already with the first intermediate level of the hierarchy Q_{1+ABC}. The first important result is that for $P_s = 1$ we get $P_{max} = \frac{1}{2}$ for any $\epsilon < \frac{1}{2}$. This means that if we have the maximal quantum violation we can fully amplify arbitrarily weak randomness. However certifying that P_s is exactly 1 would take an infinite amount of time so the main result of our analysis is that for any $\epsilon < \frac{1}{2}$ there exists $P_s < 1$ such that $\epsilon' = P_{max} - \frac{1}{2} < \epsilon$. Our results are illustrated by two figures. First shows the upper bound on ϵ' as a function of ϵ and P_s. The second shows the critical value of P_s such that for the success probabilities above it $\epsilon' < \epsilon$.

V. FULL RANDOMNESS AMPLIFICATION PROTOCOL

If, in every round of the experiment, the device would have the same probability of success we could simply take the outcomes of the experiment as our final sequence $\vec{y}$ and know its ϵ' from P_s. Unfortunately we cannot assume that and have to apply some classical postprocessing.

First we need to choose the confidence parameter $\delta < 1$ and the target ϵ'. Our aim is to use ϵ-free source to get a single bit of ϵ'-free randomness and certify it with probability of error less than $1 - \delta^2$. We will now show that it is possible for any triplet $\delta < 1, \epsilon \leq \frac{1}{2}$ and $\epsilon' > 0$. Consider the following protocol:

1. Run a nonlocal game N times using ϵ-free source for the inputs.

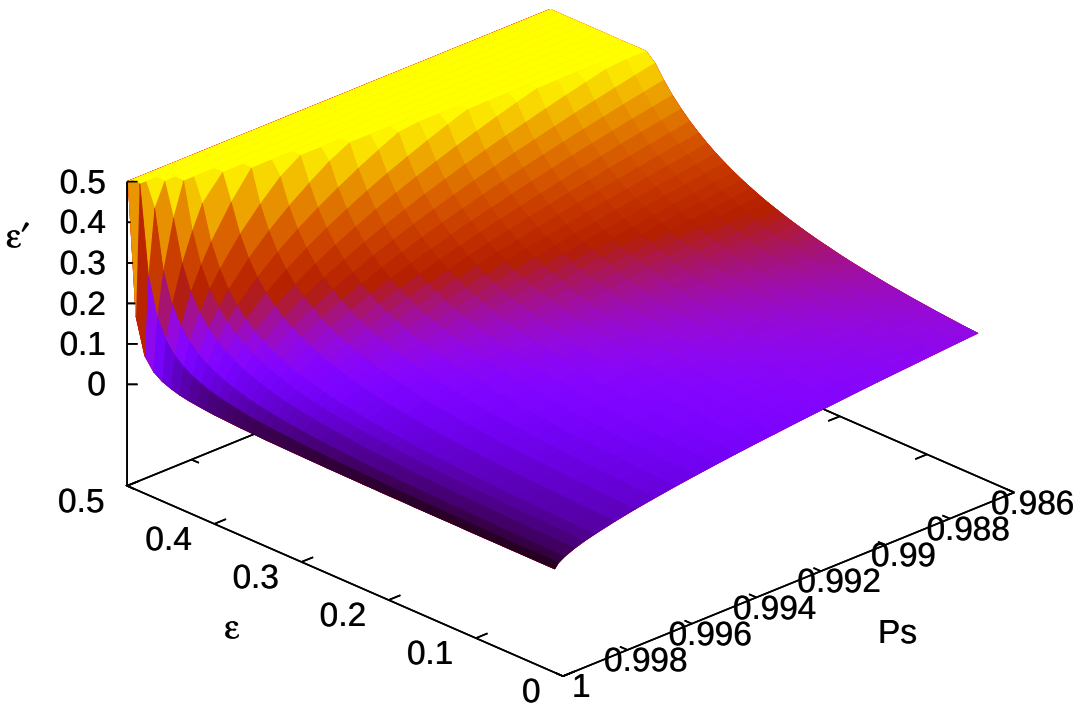

FIG. 1: Maximal bias of the measurement outcome as a function of the weakness of randomness and success probability of winning in a nonlocal game based on tripartite Mermin inequality. This plot can be also understood as a critical value of the success probability required to take inputs from ϵ-free source and get outcomes with bias less than ϵ'.

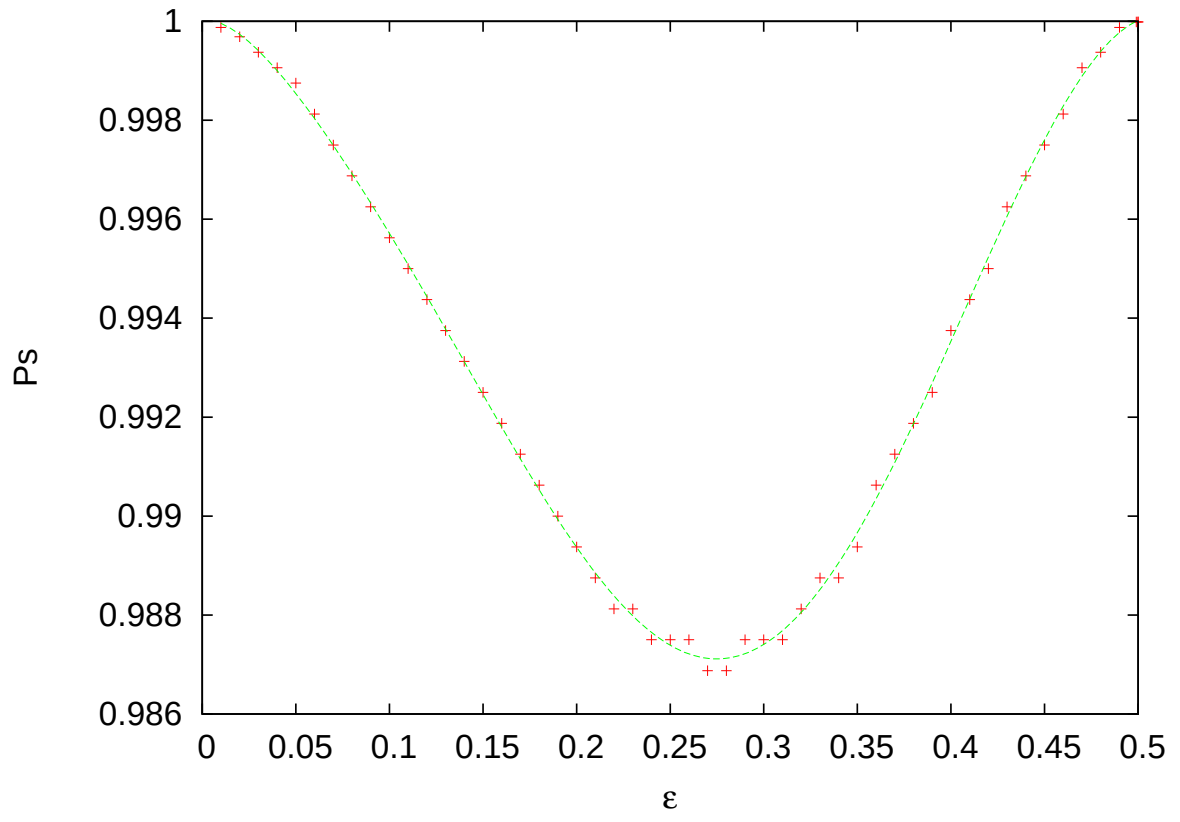

FIG. 2: Critical success probability of winning probability in a nonlocal game based on tripartite Mermin inequality necessary for randomness amplification. It can be obtained from Fig.1 by finding, for each ϵ, minimum value of P_s such that $\epsilon' < \epsilon$. If, in each round of Bell experiment, the value of P_s would be the same this would also be a sufficient condition.

2. Calculate the estimate P_{est} of the average success probability P_{avg}. If it is below P with probability greater than δ abort.

3. Use the ϵ-free source to choose one of the N rounds and take Alice's outcome to be the output bit of the whole protocol. This bit is ϵ'-free with probability at least δ^2.

What remains to be done is to find the values of the parameters N and P and prove that the protocol indeed works as advertised. Though, the structure of the protocol is the same for both games the parameters are calculated in a slightly different way.

In the case of tripartite Mermin inequality, because we were able to restrict our analysis to a particular kind of extremal source, the inputs of the nonlocal game are i.i.d. we can apply the result of [6]

$$P\left(P_{avg} < P_{est} - x\right) \leq \delta, \tag{5}$$

where

$$\delta = \exp\left(-\frac{x^2 N}{2\left(1+\left(\frac{1}{2}-\epsilon\right)^{-2}\right)^2}\right), \tag{6}$$

and P_{est} is the estimated success probability. This gives us a requirement on N which we need to fulfill if we want to be able to estimate P_{avg} with good confidence.

Now, using Fig. 1 we can find the critical value of P_s that corresponds to the target ϵ' and given ϵ and denote it $P_{\epsilon'}$. We want to have at most qN out of N rounds with randomness weaker than ϵ' or, in other words, success probability below $P_{\epsilon'}$. To estimate q let us write what P_{avg} is

$$P_{avg} = \frac{1}{N}\sum_j P_s^j = \frac{1}{N}\left(\sum_{j\in G} P_s^j + \sum_{j\notin G} P_s^j\right), \tag{7}$$

where G is the subset of indexes j such that $P_s^j > P_{\epsilon'}$. It has $(1-q)N$ elements. Now we can write

$$P_{avg} \leq \frac{1}{N}\left((1-q)N + qNP_{\epsilon'}\right) = (1-q) + qP_{\epsilon'}. \tag{8}$$

Using (5) we know that with probability at least δ

$$P_{est} - x \leq (1-q) + qP_{\epsilon'} \tag{9}$$

$$q \leq \frac{1-P_{est}+x}{1-P_{\epsilon'}}. \tag{10}$$

We want the probability that in the last step of the protocol the bit is chosen from the subset G to be larger than δ

$$\left(\frac{1}{2}+\epsilon\right)^{-\log q} < 1-\delta. \tag{11}$$

This will hold if

$$P_{est} > P = 1-(1-P_{\epsilon'})2^{-\log_{\frac{1}{2}+\epsilon}(1-\delta)} + x \tag{12}$$

For any triplet $\delta < 1, \epsilon \leq \frac{1}{2}$ and $\epsilon' > 0$ x can be chosen arbitrarily small by taking N large enough. This enables us to always find $P < 1$. A critical value of P as a function of ϵ is plotted in Fig 3.

VI. CONCLUSIONS

We have demonstrated that amplification of arbitrarily weak randomness is possible using quantum resources. We were able to derive the necessary bounds on the violation of Bell inequalities as a function of the randomness' quality. These bounds are below the maximum

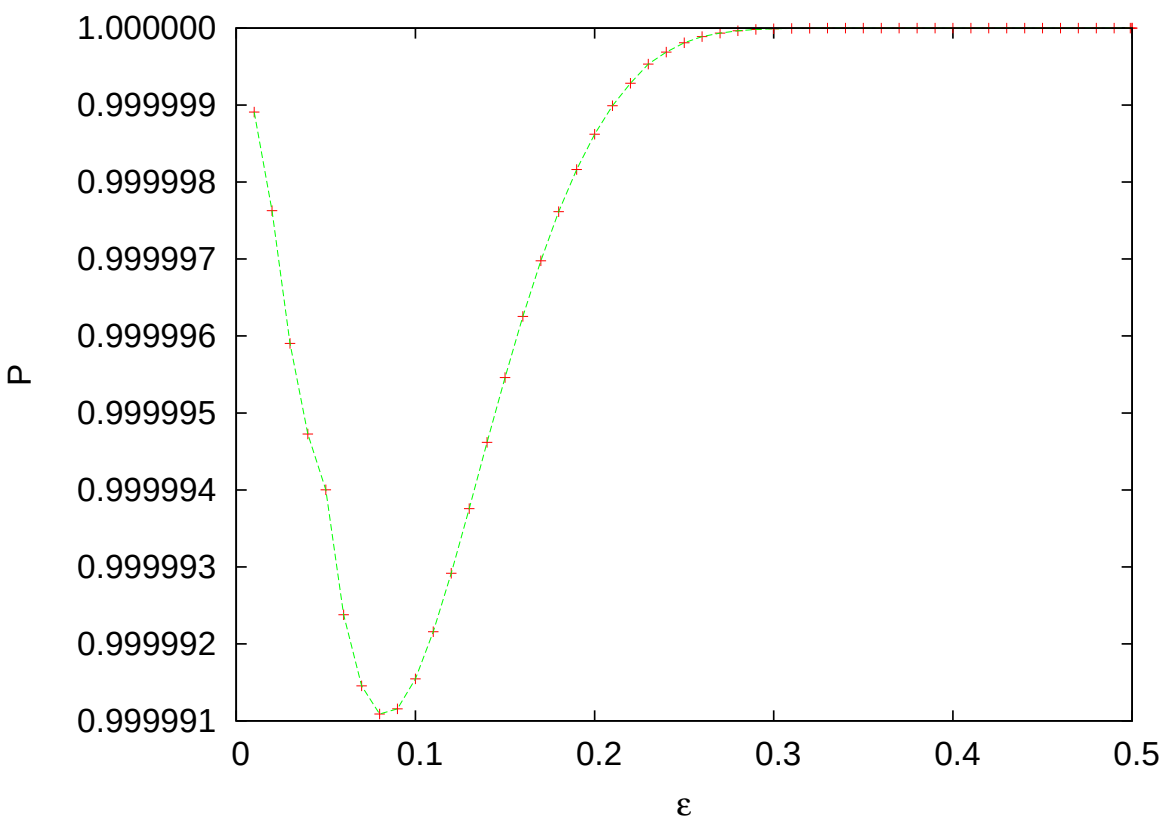

FIG. 3: A sufficient condition for the violation of tripartite Mermin inequality as a function of randomness quality. Although it is not clearly visible at the scale of the plot, the values of P are strictly lower than 1 for all $0 < \epsilon < \frac{1}{2}$. For this plot we have taken $x = 0$ and $\delta = 0.99$.j

achievable by quantum resources for arbitrarily weak initial randomness. We have also presented a protocol that uses Bell inequalities for randomness amplification and calculated all of its parameters.

We find of a particular interest the fact that the inequalities we have demonstrated that perform well in randomness amplification only do so in quantum theory. In fact, it is known that neither of them can amplify any kind of randomness when only no-signalling is assumed. This follows straightforwardly from the results of [15] for magic square game and from [5] for tripartite Mermin inequality.

As our paper solves an open problem it also poses some new ones: Is amplification of arbitrarily weak randomness possible with imperfect correlations for no-signalling theories? Are there any protocols more efficient than ours in the terms of ratio of random bits generated to random bits used?

But the most important open problem is whether there are better amplification protocols using the same Bell inequalities. We conjecture that if, in the last step, the parties would choose and apply random hash function to the whole set of measurement outcomes rather than simply randomly choosing one of the bits then the critical success probabilities would be of a scale from Fig.2 rather than Fig.3.

Acknowledgments

M.P. thanks Antonio Acin for discussions. We also wish to thank Michał Horodecki for sharing preliminary version of [14] with us. This work is supported by UK EPSRC, FNP TEAM and ERC grant QUOLAPS. SDP was implemented in OCTAVA using toolbox [16].

---

[1] D. DiVincenzo, Science **270** (5234), 255261 (1995).
[2] V. Scarani, H. Bechmann-Pasquinucci, N.J. Cerf, M. Dusek, N. Lütkenhaus, M. Peev, Rev. Mod. Phys. **81**, 1301 (2009).
[3] R. Colbeck, R. Renner, Nature Physics **8**, 450-454 (2012).
[4] M. Santha, U. Vazirani, Proc. 25th IEEE Symposium on Foundations of Computer Science (FOCS-84), 434 (IEEE Computer Society, 1984).
[5] R. Gallego, Ll. Masanes, G. de la Torre, C. Dhara, L. Aolita, A. Acn, arXiv:1210.6514 (2012).
[6] S. Pironio, A. Acin, S. Massar, A. Boyer de la Giroday, D. N. Matsukevich, P. Maunz, S. Olmschenk, D. Hayes, L. Luo, T. A. Manning, C. Monroe, Nature **464**, 1021, (2010).
[7] J.F. Clauser, M.A. Horne, A. Shimony, R.A. Holt, Phys. Rev. Lett. **23**, 880 (1969).
[8] T. Lawson, N. Linden, S. Popescu, arXiv:1011.6245 (2011).
[9] M. Navascues, S. Pironio, A. Acin, New Journal of Physics **10**, 073013 (2008).
[10] A. Fine, Phys. Rev. Lett. **48**, 291 (1982).
[11] S.L. Braunstein, C.M. Caves, Ann. Phys. (N.Y.) **202**, 22 (1990).
[12] P.K. Aravind, American Journal of Physics **72**, 1303-7 (2004).
[13] N.D. Mermin, Phys. Rev. Lett., **65**, 15 (1990).
[14] A. Grudka *et.al.*, in preparation.
[15] K. Horodecki, M. Horodecki, P. Horodecki, R. Horodecki, M. Pawłowski, M. Bourennane, arXiv:1006.0468 (2010).
[16] J. Sturm, SeDuMi, a MATLAB Toolbox for Optimization Over Symmetric Cones Online at http://sedumi.mcmaster.ca.